

PerformancePro

Pumps

For performance that's
OFF THE CHART
of ordinary pumps!



PerformancePro Pumps continues to bring you top quality products and unmatched service. Whether your needs are residential or industrial, we guarantee each of our systems to be unsurpassed in efficiency, performance, and reliable operation. We stand behind all of our products with the expertise gained from more than twenty-five years in the pump technology industry. Compared to the competition, PerformancePro Pumps are off the charts!

PerformancePro
WellSpring

PerformancePro Pumps

Simply the best combination
of performance, reliability,
and energy savings!

Features & Benefits

- ▶ Semi-open impeller design helps prevent clogging – waterproof cable and seals protect motor
- ▶ Overload protection helps prevent motor burn out
- ▶ Stainless Steel and plastic part design protects against corrosion
- ▶ Float switch available for automatic start/stops
- ▶ Spring loaded mechanical seal meets API regulations – life expectancy of more than 100,000 hours
- ▶ 20 ft. cord (16 AWG) with 115 volt plug (WS1/4-33, WS1/3-44, WS1/2-58, WS1-66)
- ▶ 2 year limited warranty

WellSpring

The PerformancePro WellSpring

is a submersible pump line that is designed for easy in-pond, skimmer, or sump installation. The high quality components and durable construction ensure efficient operation and long term reliability. PerformancePro WellSpring pumps are available in popular sizes from 1/4 to 1 horsepower.




Pump Specifications

MODEL	PORT SIZE	ADAPTER (INCLUDED)
WS1/4-33	2" Female Threaded	2" Barbed
WS1/3-44	2" Female Threaded	2" Barbed
WS1/2-58	2" Female Threaded	2" Barbed
WS1-66	2" Female Threaded	2" Barbed

Motor Specifications

MODEL	HP	FLA	VOLTAGE	MAX. WATTS	HZ.
WS1/4-33	1/4	3.5	120	375	60
WS1/3-44	1/3	4.6	120	538	60
WS1/2-58	1/2	7.1	120	840	60
WS1-66	1	10.1	120	1170	60

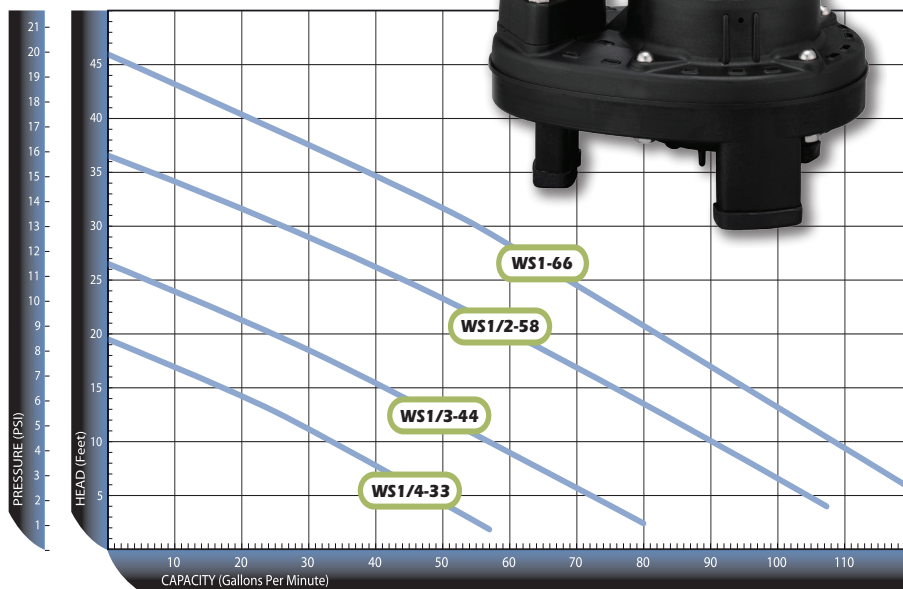

Ambient Clear Water SP GR 1.0

Performance

MODEL	MAX. HEAD	MID POINT FLOW	MAX. FLOW
WS1/4-33	19 ft.	1500 GPH @ 14'	3420 GPH @ 1'
WS1/3-44	27 ft.	2700 GPH @ 13'	4800 GPH @ 3'
WS1/2-58	38 ft.	3000 GPH @ 23'	6420 GPH @ 4'
WS1-66	46 ft.	3300 GPH @ 28'	7260 GPH @ 5'

Dimensions

MODEL	CORD LENGTH	TOTAL HEIGHT	BASE LENGTH	BASE WIDTH
WS1/4-33	20'	15.25"	9.5"	7"
WS1/3-44	20'	16"	9.5"	7"
WS1/2-58	20'	17"	9.5"	7"
WS1-66	20'	17.5"	9.5"	7"

Data is subject to change.

Easy to install. Inexpensive to operate. A joy to own.

For More Information, give us a call or visit us on the Web:

503.356.5888
www.performancepropumps.com